

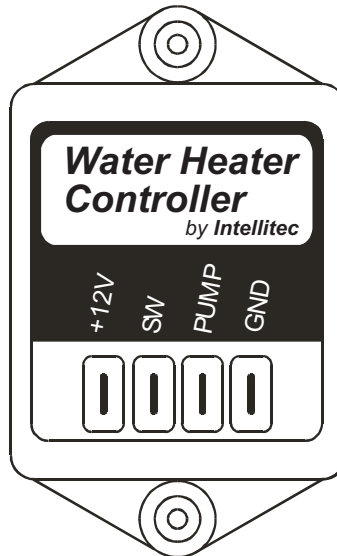



Monoplex System

Intellitec's Monoplex™ System -

"The one wire solution". These components bring simplification and increased function to the complicated wiring structure of RVs and boats.

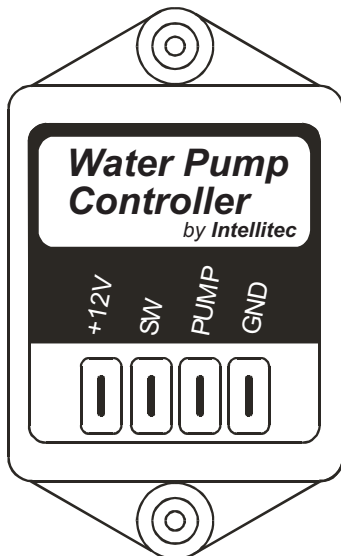

Monoplex
Single Switch



Monoplex
Dual Switch



Intellitec

131 Eisenhower Lane North
Lombard, IL 60148
630.268.0010 / 1.800.251.2408
FAX 630.916.7890

P/N 53-22036-000 Rev.C 041405


Monoplex System

In a typical installation a **MONOPLEX™** Controller is located near the load to be connected, with the control wire routed to the remote switch or switches, which are located in convenient places throughout the vehicle. By using this scheme, the need to run the heavy gauge wire to each switch is eliminated, along with difficulties of connections and safety problems normally associated with conventional techniques.

Each component of the **MONOPLEX™** System has been designed to work together, in the RV/Marine environment, to provide a high quality, simple, and trouble free product.

Specifications:

Operating Voltage: 10 to 16 VDC
Standby current draw: 2 milliamps
Operating temperature: -40°C to +85°C
(-40°F to +185°F)

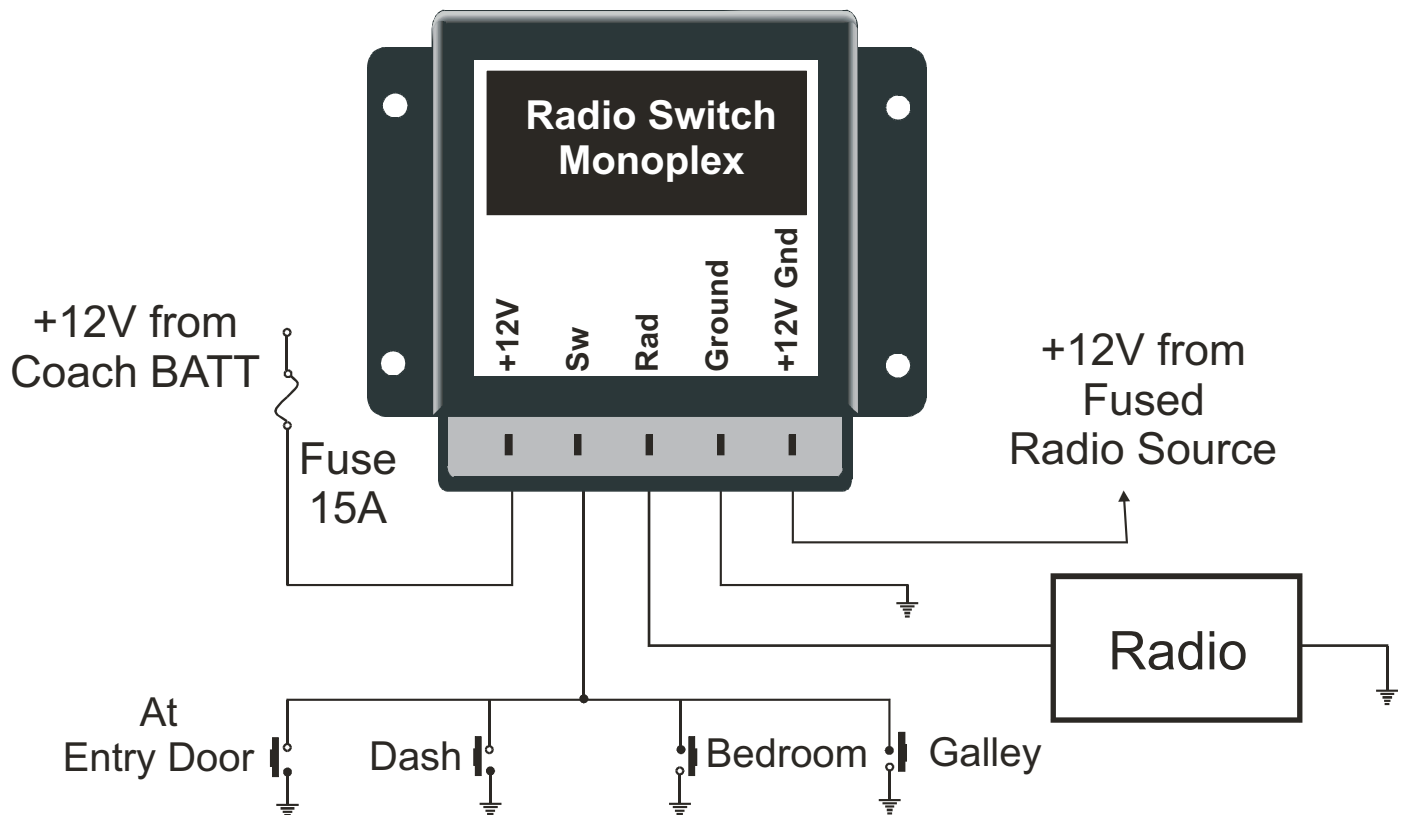

Intellitec

131 Eisenhower Lane North
Lombard, IL 60148
630.268.0010 / 1.800.251.2408
FAX 630.916.7890

P/N 53-22036-000 Rev.C 041405